


All Geofire door holders are supplied with a keeper plate as standard but an alternative design can be supplied to suit the installation. All keeper plates are also available as spare parts.

The low profile keeper plate may be used when it is desirable to minimise the distance from the held-open door to magnet.


The chain keeper may be used where the door will not open back to the wall. The chain keeper will bridge the gap from the open door to where the magnet is mounted.

Item	Holding force	Adjustment	Order code
Low profile keeper plate	200N	15 °	2-31-0307-N237
Adjustable keeper plate	200N	30 °	2-31-0310-U005
Adjustable keeper plate	500N	30 °	2-31-0507-Z001
Low profile keeper plate	500N	15 °	2-31-0507-Z011
Chain keeper	200N	n/a	2-31-0308-Z082
Chain keeper with rubber O ring	200N	n/a	2-31-0308-Z083

**KEEPER PLATES:**

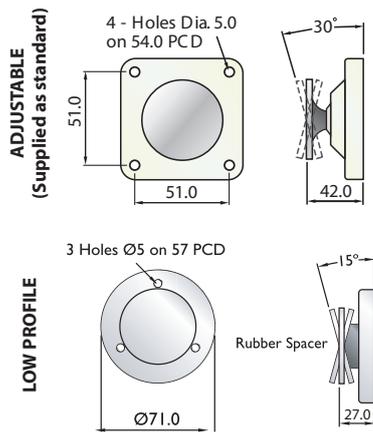

**CHAIN KEEPER**

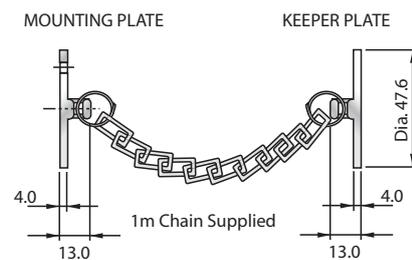

Geofire reserve the right to change the specifications in this data sheet without prior notification