

DECORATIVE WALL MOUNTED DOOR HOLDERS

- 24 Vdc AND 230 Vac SUPPLY VOLTAGE
- 200N HOLDING FORCE
- ZERO RESIDUAL FORCE
- VARIETY OF HIGH QUALITY FINISHES
- FLUSH OR SURFACE MOUNTING
- MANUAL RELEASE SWITCH
- APPROVED TO EN1155 AND CE MARKED
- IDEAL FOR HOTELS, OFFICES & SIMILAR PRESTIGIOUS INSTALLATIONS



Electromagnetic fire door holders are designed to hold open fire doors in any area where easy access is essential in relation to the Equality Act. They can be used in conjunction with any fire alarm system. When an alarm is triggered, power to the door holder is cut, allowing the fire door, with its standard closing mechanism, to shut automatically.


Decorative door holders are available in bright chrome, lacquered brass and stainless steel finishes. They are particularly suitable for use in prestigious venues such as offices, hotels, conference centres.

The keeper plate for the decorative door holder is supplied with a matching surface finish. The magnet is supplied with a standard single metal electrical back box, which enables the unit to be flush mounted.

If required, a surface mounting box with matching finish is available, with two 20mm entry holes and blanking plugs.


TECHNICAL INFORMATION

Supply voltage	24 Vdc
Axial holding force	200 N (+20%)
Power rating	1-15 W
Residual holding force	Zero
Ambient temp.	0 - 40°C
Surface finish	Bright Chrome, Lacquered Brass, Brushed Stainless Steel
Protection	IP51
Weight	500g

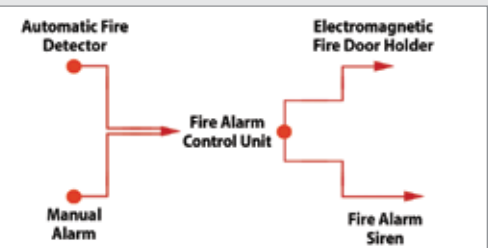

ORDER CODES :	BRIGHT CHROME	LACQUERED BRASS	STAINLESS STEEL
24 Vdc flush mounted holder with switch	3-59-0301-C001	3-59-0301-E001	3-59-0301-M001
230 Vac flush mounted door holder	3-59-0302-C001	3-59-0302-E001	3-59-0302-M001
Surface mounting kit	2-34-0424-C091	2-34-0424-E091	2-34-0424-M095

TYPE 59 ASSEMBLY

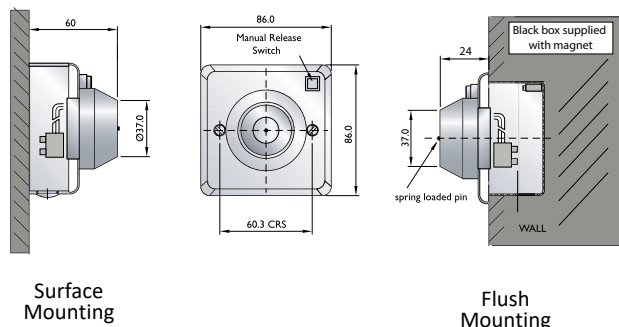

KEEPER PLATE

